

SINGLE MAGAZINE LOADER

The unit loads your production line automatically by pushing PCB's out of a magazine onto the conveyor of the downstream machine.



STANDARD
SERIES





STANDARD
SERIES

SINGLE MAGAZINE LOADER

STANDARD FEATURES

- > Magazine is manually placed on the platform and clamped in position.
- > Flexible platform to suit standard magazines.
- > Controlled by PLC.
- > Exchange magazine from the rear of the machine.
- > Regulated pressure on attached pneumatic pusher.
- > Pusher position adjustable to centre of the magazine.
- > Towerlight display for machine status.
- > Selectable pitch settings.
- > CE certified.

OPTIONS


- > Frontside magazine loading
- > Hybrid magazine
- > Touchscreen display
- > Alarm buzzer

Other options available on request

GENERAL MACHINE SPECIFICATION

Transfer height	950 mm \pm 25 mm*
Colour	RAL 9002*
Flow direction	Left to right*
Fixed rail	Front*
Machine interface	SMEMA*
Power supply	230 VAC/50 Hz/1 Ph
Power consumption	350 VA max.
Air supply	6 bar
Air consumption	10 ltr/min max.
PCB loading time	\pm 6 seconds
Pitch control	1-4, 10 mm pitch
Max. total magazine weight	50 kg

** or specify*

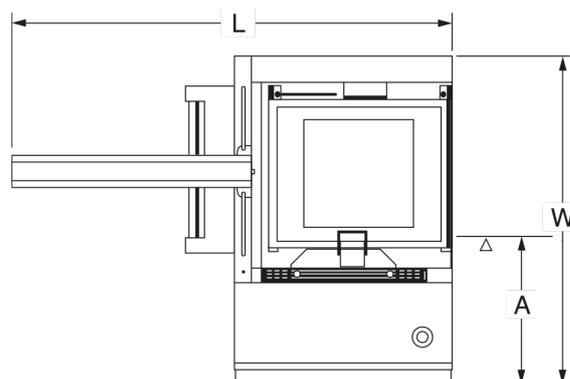

MACHINE SIZES	NTM 710LM	NTM 710LL
Machine L x W x H (mm)	1080 x 845 x 1300	1330 x 1005 x 1300
Weight (Kg)	170	180
PCB Length (mm)	80 - 330	80 - 460*
PCB Width (mm)	50 - 250	50 - 407*
Max. magazine dimensions (mm)	360 x 321 x 583	535 x 530 x 570*
Fixed rail to front (A) (mm)	452	452

** or specify*

CLEVER AS EVER