

# LINKING CONVEYOR

*This unit is used to link between production machines or board handling units.*



STANDARD  
SERIES





**STANDARD  
SERIES**

# LINKING CONVEYOR

## STANDARD FEATURES

- > Multi zone concept available, standard segment length is 500 mm.
- > Conveyor width adjustment using hand crank.
- > Controlled by PLC.
- > CE certified.

## OPTIONS


- > Non standard conveyor/segment lengths
- > Hinged top cover
- > Electrical conveyor width adjustment
- > Automatic conveyor width adjustment
- > Variable speed per segment
- > Dual speed per segment
- > Inspect function at exit sensor.

*Other options available on request*

## GENERAL MACHINE SPECIFICATION

Transfer height	950 mm ± 25 mm*
Colour	RAL 9002*
Flow direction	Left to right*
Fixed rail	Front*
Machine interface	SMEMA*
Conveyor concept	ESD belt
Belt speed	14 m/min.
PCB edge support	3 mm
Components clearance	Top 30 mm, bottom 30 mm
Power supply	230 VAC/50 Hz/1 Ph
Power consumption	100 VA max.

*\* or specify*

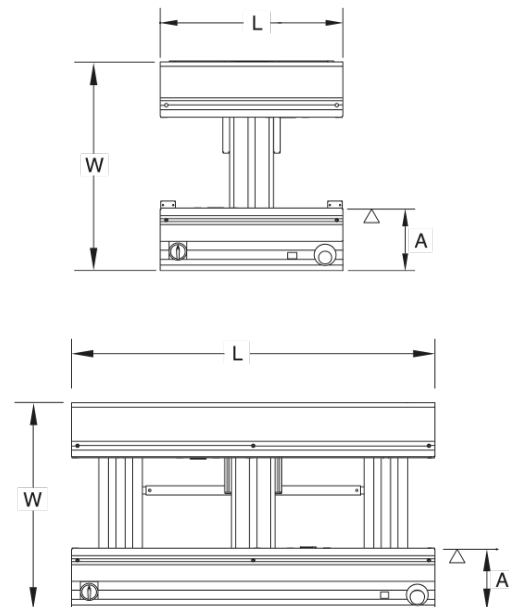

## STANDARD LENGTHS (X) 500, 1000

MACHINE SIZES	NTM410M	NTM410L	NTM410XL
Machine L x W x H (mm)	(X) x 570 x 985	(X) x 727 x 985	(X) x 780 x 985
Weight (Kg)	50 - 80	70 - 100	80 - 110
PCB Length (mm)	80 - 457	80 - 457	80 - 460*
PCB Width (mm)	50 - 250	50 - 407	50 - 460*
Fixed rail to front (A) (mm)	168	168	168

*\* or specify*