

IN LINE WORKSTATION

The workstation is used where manual assembly work is performed on the PCB without removing it from the PCB assembly line.



STANDARD
SERIES





**STANDARD
SERIES**

IN LINE WORKSTATION

STANDARD FEATURES

- > Multi zone concept available, standard segment length is 500 mm.
- > Work and by-pass mode selectable.
- > Conveyor width adjustment using hand crank.
- > Centre PCB stop position
- > Enhanced stability.
- > Controlled by PLC.
- > ESD bracelet connection.
- > Foot rest.
- > Sliding parts shelf.
- > LED overhead lighting.
- > CE certified.


OPTIONS

- > Non standard conveyor/segment lengths
- > Electrical conveyor width adjustment
- > Automatic conveyor width adjustment
- > Additional part shelf
- > Bin rail
- > PCB release foot switch
- > Variable speed per segment
- > Dual speed per segment

Other options available on request

GENERAL MACHINE SPECIFICATION

Transfer height	950 mm ± 25 mm*
Colour	RAL 9002*
Flow direction	Left to right*
Fixed rail	Front*
Machine interface	SMEMA*
Conveyor concept	ESD belt
Belt speed	Fixed in 14 m/min, variable out 2-14 m/min.
PCB edge support	3 mm
Components clearance	Top 30 mm, bottom 30 mm
Power supply	230 VAC/50 Hz/1 Ph
Power consumption	150 VA max. * or specify

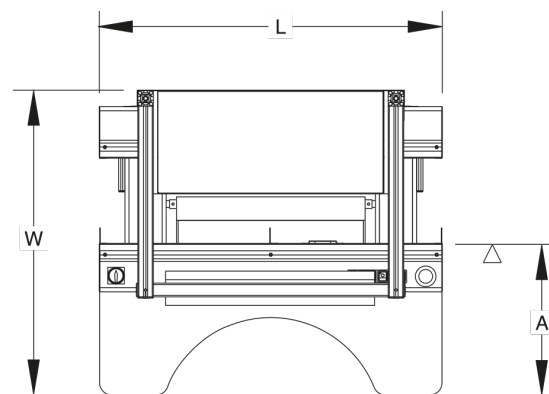

STANDARD LENGTH (X) 1000, 1500

MACHINE SIZES	NTM530WSM	NTM530WSL	NTM530WSXL
Machine L x W x H (mm)	(X) x 887 x 2190	(X) x 1044 x 2190	(X) x 1095 x 2190
Weight (Kg)	100 - 150	110 - 160	130 - 180
PCB Length (mm)	80 - 457	80 - 457*	80 - 460*
PCB Width (mm)	50 - 250	50 - 407	50 - 460*
Fixed rail to front (A) (mm)	438	438	438

*** or specify**